PROJECT PORTFOLIO & CAPABILITY RECORD

Sandi Nurpeissova

Senior BIM Coordinator

Luxury hospitality · International coordination · ISO 19650

Telephone	+44 (0)7462 724884
Email	sandinurpeissova99@gmail.com
Location	London, UK



Profile

Senior BIM professional with over six years of international experience across architectural practice, higher education and industry training.

My work extends beyond coordination: taking part in establishing practice-wide BIM standards, authoring and owning BEPs, administering CDE environments, and acting as primary BIM contact for clients and consultant teams.

Based

London, UK

Languages

English, Russian, Kazakh

Experience

Career at a glance

WilkinsonEyre

Senior BIM Coordinator · London · Dec 2022 to present

- Sole BIM coordinator across up to eight concurrent projects, from feasibility to construction
- Authors and owns BEPs under ISO 19650; Information Manager contact for clients and consultants
- Sets up and administers CDEs on ACC, BIM 360 and SharePoint
- Federated model coordination and Navisworks clash detection with structural and MEP teams
- Revit Best Practice Guide v2.1, practice template and content standards
- BIM onboarding and Revit training for project teams

Zaha Hadid Architects

BIM Designer · London · Sep 2021 to Dec 2022

- Phase 2 Project Information Model owner, Mercury House Melia Hotel and Serviced Apartments, Malta
- Federated Navisworks model and monthly clash issues to the client
- Genzon HQ, Wuhan: one of few working across all nine towers, Rhino to Revit
- BIM implementation plan for the practice: SWOT analysis and BIM road map

Teaching & education

Higher education and industry training

- Visiting Lecturer, University of Westminster, Sep 2020 to Nov 2022
- Revit and AutoCAD Tutor, Training Square, Oct 2019 to Nov 2020
- MSc Global BIM Management, Universitat de Barcelona and Zigurat, 2020. First class, top of year
- BSc Architectural Technology, University of Westminster, 2018. 2:1, CIAT Gold Award

Revit · Navisworks Manage · AutoCAD · Rhino · ACC / BIM 360 · Solibri · BIMcollab ZOOM · SharePoint · Bluebeam

Languages: English, Russian, Kazakh

Core BIM capabilities

From open standards to practice leadership

Standards & compliance

- ISO 19650-1, -2, -3 information management
- BS 1192 / PAS 1192 series; BIM Level 2
- EIR compliance; COBie / Uniclass for asset handover

Coordination & technical

- Federated Revit model coordination across multi-disciplinary teams
- Navisworks clash detection & resolution management
- CDE administration on ACC / BIM 360 — up to eight live projects
- Solibri, BIMcollab ZOOM, Plannerly for model QA

Leadership & practice

- Supported the transition to structured, standards-driven information management
- Authored the Revit Best Practice Guide (v2.1), assisted in the creation of the template & content standards
- BIM onboarding & training for project teams
- Primary BIM contact for consultants, client advisors & contractors

Revit · Navisworks · Autodesk Construction Cloud · BIM 360 · Solibri · BIMcollab ZOOM · Plannerly · Rhino · AutoCAD · SharePoint · COBie / Uniclass

Contents

Selected work

A selection of the WilkinsonEyre projects I have worked on across the UK, Saudi Arabia and Australia, prior experience at Zaha Hadid Architects, and academic projects.

WilkinsonEyre — selected projects 01

Prior experience — Zaha Hadid Architects 02

Education & academic work 03

Contact 04

SECTION 01

WilkinsonEyre

A selection of the projects I have worked on as BIM Coordinator, December 2022 to present — infrastructure, stadia, commercial, residential, academic and bespoke schemes across the UK, Saudi Arabia and Australia.



QIDDIYA · PROJECT 02034

Five-star amenity above the Speed Park circuit

Image: WilkinsonEyre

Hospitality & motorsport · Saudi Arabia

Qiddiya Motorsport Complex

Resort Core District · Project 02034

Trio-branded hotel complex overlooking the Speed Park circuit — a 5-star Sports Car Hotel, 4-star lifestyle hotel and 5-star serviced apartments on a shared podium, approx. 50,000 sqm.

Role & contributions

Named BIM Coordinator on the client-approved BEP — BIM Manager-level responsibilities

Coordinated architectural delivery against the BIM Authoring Matrix across Stages 0–IFC

Supported spatial coordination with SSH and 15+ specialist sub-consultants

ISO 19650 · COBie-UK 2012 · Revit 2023 · Navisworks · Client 5-stage CDE



Equestrian · St John's Wood, London

SJW Riding School

St John's Wood Square · Project 00987

Bespoke equestrian riding-school facility within the St John's Wood Square development — active in detailed design and construction-stage coordination.

Role & contributions

- Coordinated IFC-stage delivery for bespoke elements — feature stair, basin design
- Managed coordination for construction-stage technical queries
- Fire protection to existing steelwork and flooring specification

ISO 19650 workflow · Revit · Navisworks



Image: WilkinsonEyre

Commercial fit-out · Canary Wharf

Project Saturn

Citi, 25 Canada Square · Project 01601

Fit-out and refurbishment scheme for Citi at 25 Canada Square, delivered with Turner & Townsend, Mace and ISG. BREEAM 2014 RFO 'Excellent' targeted.

Role & contributions

Managed compliance with the BIMBox-issued BEP and clash detection protocols

Supported BREEAM RFO tracking coordination alongside sustainability inputs

PEP (Turner & Townsend) · BEP Rev P10.01 · Revit · Navisworks · BIMBox CDE



Image: WilkinsonEyre

Mixed-use · Melbourne, Australia

600 Collins Street

Project X · Project 01632

Commercial office tower and mixed-use scheme in Melbourne for Hines/Everland, partnering with Architect of Record Architectus.

Role & contributions

Ran WEA's Revit model production and exchange via BIM 360 / ACC

Worked within tightening clash tolerances (25 → 10 → 5 mm across SD/DD/CD)

Coordinated with Architectus's Design BIM Manager on naming, exchange and issue tracking

BIMForum LOD 100–500 · ISO 19650-aligned · Revit 2022 · Navisworks · BIM 360 / ACC · Aconex · BCapp



Image: WilkinsonEyre

Commercial · Wembley, London

UCG Wembley

8 Fulton Road · Project 01554

Commercial and mixed-use development at 8 Fulton Road, Wembley. Acting as BIM Coordinator and Information Manager contact for the client and consultant team.

Role & contributions

- Set up and administered the project CDE from Stage 3 onward
- Coordinated with Max Fordham (MEP) and wider consultant BIM managers
- Issued the BEP for client (Bidwells) and consultant sign-off

BIM Level 2 · BEP v1.2 · Revit · Project CDE



Image: WilkinsonEyre

Life sciences · Hinxton, Cambridgeshire

Wellcome Genome Campus

Life sciences campus · Project 01847

Life sciences campus development at Hinxton. WilkinsonEyre entered a Stage 5 sub-consultant agreement with main contractor Winvic, following earlier design stages.

Role & contributions

- Authored the draft BIM Execution Plan for the campus scheme
- Coordinated the transition into Stage 5 construction workflows with Winvic
- Integrated 3D laser survey data into the model environment

Draft BEP 01847-WEA · Revit · 3D laser survey integration



Image: WilkinsonEyre

Academic · St Andrews, Scotland

University of St Andrews

New College, North Haugh · Project 01932

Academic campus development at the North Haugh Campus. Primary point of contact for the university's BIM and information requirements.

Role & contributions

- Coordinated the university's Exchange Information Requirements into the BEP
- Managed site-wide 3D laser survey scope with Buro Happold and Gross.Max
- Distributed and tracked BEP comments across the multidisciplinary team

EIR P03 · BEP (April 2026) · Revit · 3D laser scanning



Image: WilkinsonEyre

Stadia · London

Lord's Cricket Ground

Tavern & Allen Stands · Project 02037

New stand development at Lord's, won via competition. With no client EIR issued, the BEP I authored sets out the information standards.

Role & contributions

- Authored the project BEP in the absence of a client-issued EIR
- Defined a bespoke 7-point Level of Information Need scale, embedded in the Responsibility Matrix
- Developed the Design Responsibility Matrix with BuroHappold through design workshops
- Coordinated MEP contractor's design portion exchange

ISO 19650 · Revit 2023 · Navisworks · SharePoint CDE · Aconex



Image: WilkinsonEyre

Commercial · City of London

Minster Court

1 & 2 Minster Court · Project 02058

Commercial and mixed-use redevelopment in the City of London. Lead author of the project's BIM documentation, working with the design team through comment rounds.

Role & contributions

- Authored the BEP and Level of Information Need Matrix
- Coordinated the project EIR into the BIM Execution Plan
- Managed multi-round comment resolution with the design team
- Published and version-controlled documentation via Autodesk Construction Cloud

EIR & BEP (P01, 2025) · ISO 19650 · Revit · Autodesk Construction Cloud



Commercial · City of London

130 Fenchurch Street

Office & hospitality · Project 02163

Commercial office redevelopment in the City of London. RIBA Stage 2 delivered with Arup. I author and review the project's Exchange Information Requirements and BEP revisions.

Role & contributions

Coordinated design-team comment rounds on the BEP (Revision P02) with Arup

Managed EIR compliance tracking through RIBA Stage 2

EIR P02 (June 2025) · BEP P02 (July 2025) · Revit · Autodesk Construction Cloud



Image: WilkinsonEyre

Commercial · Holborn, London

Thavies Inn

Commercial development · Project 01557

Commercial development in Holborn. I set up the project model environment from inception and formalised its information standards under ISO 19650.

Role & contributions

- Set up the Revit model environment and coordination file structure from inception
- Authored the BEP and defined the NBS LOD Banding against RIBA stages
- Advised the project team on BIM Level 2 / ISO 19650 documentation

ISO 19650 Parts 1–5 · BEP Rev 2.0 (Jan 2025) · Revit · OS Map / GIS · SharePoint CDE



Image: WilkinsonEyre



SECTION 02 · PRIOR EXPERIENCE

Zaha Hadid Architects

BIM Designer · September 2021 – December 2022 · London

Image: Zaha Hadid Architects

Hospitality & residential · Malta

Mercury House

Melia Hotel & Serviced Apartments · Zaha Hadid Architects

Five-star hotel and serviced apartment tower in Malta. I held full Phase 2 Project Information Model ownership across design and construction stages.

Role & contributions

- Owned and managed the project information model — all 2D and 3D Revit modelling
- Coordinated federated models and clash detection between disciplines in Navisworks
- Managed information workflows between external consultants and internal teams
- Reviewed, quality-checked and issued drawing packages

Project Information Model ownership · Revit · Navisworks · BIM 360



Image: Zaha Hadid Architects

Zaha Hadid Architects · Mercury House

BIM coordination

Information & content

Managing information exchange through BIM 360 with the consultants

Content management

Revit — project and family models

Reviewing, checking and commenting on internal & external drawings

Model coordination

Managing the federated model in Navisworks — monthly issues to the client

Clash detection in Navisworks

Managing model coordination between disciplines



Image: Zaha Hadid Architects

Commercial · Wuhan, China

Genzon Headquarters

Nine-tower complex · Zaha Hadid Architects

Nine-skyscraper tower complex in Wuhan — a highly sustainable, wellness-focused cluster of offices and hotel. I was one of few to work across all nine towers.

Role & contributions

- Supported 3D and 2D package delivery across a globally distributed team
- Transferred information from Rhino to Revit; modelled 2D and 3D families
- BIM coordination, clash detection and design resolution within the BIM team
- Attended client and consultant meetings as part of the core project team

Revit · Rhino · BIM 360 · Navisworks federated model



Image: Zaha Hadid Architects

Zaha Hadid Architects · Genzon

BIM approach

BIM allowed the team to marry the information and components of the different buildings into a single model. The complex façade geometry — engulfing all building plots — posed numerous challenges, overcome through extensive BIM workflow and data handling.

BIM skills

Revit and Rhino for authoring and Rhino-to-Revit geometry transfer

BIM 360 for shared model coordination

Navisworks federated model — clash detection, client reviews, coordination

Nine skyscrapers · offices & hotel · Wuhan, China



Image: Zaha Hadid Architects

ZAHA HADID ARCHITECTS
BIM TEAM

Establishing a BIM implementation plan

The team's goal was to establish a new BIM Implementation Plan — spreading workflows and methodologies across the clusters and accommodating the growing BIM team.

MY ROLE

- Introduced and carried out the SWOT analysis
- Set up the BIM Road Map from its findings
- Specified the content-management approach with the BIM Taskforce
- Introduced Miro and Trello for the initiative



Image: Zaha Hadid Architects

SECTION 03

Education & academic work

MSc Global BIM Management — top graduate — and two undergraduate Architectural Technology projects in Revit and CLT construction.

Masters · Global BIM Management

Final Master's thesis

A simulation-based project approached with open BIM standards from the outset, run using agile and scrum. As project BIM Coordinator I worked with the BIM Manager to develop the BEP and Exchange Information Requirements.

Methods

EIR defined from the client perspective, passed through the project team to define the BEP

Level of Information Need used to control over-production of information

Trello Kanban for task tracking; Slack for communication management

FOUR-STEP MODEL VALIDATION

1. Each discipline validates its own model — no duplicates or clashes, standards adhered to
2. Combined model checked for shared origin, level containment and clashes
3. Issues communicated and resolved via BCF servers and task-team plugins
4. Steps repeat until error-free, then the model is approved for publication

Masters · Global BIM Management

QA/QC and model validation

The validation workflow I ran as project BIM Coordinator. Each model passed classification and ruleset checks in Solibri, issues were raised as BCF and resolved through BIMcollab ZOOM, and only clean models were published to the CDE.

What this shows


01 Solibri issues raised against the architectural model


02 BIMcollab model view with revision history


03 Level containment checked in the model tree


04 Four step validation loop, from IFC export to approval

Solibri · BIMcollab ZOOM · Bimsync CDE · BCF · IFC · Open BIM workflow

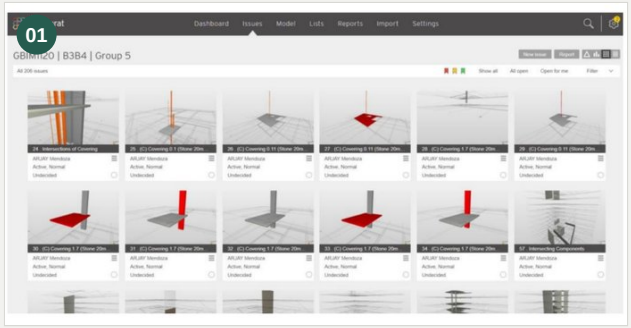

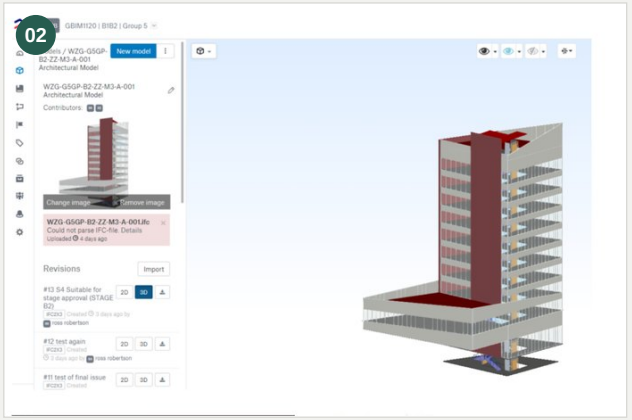

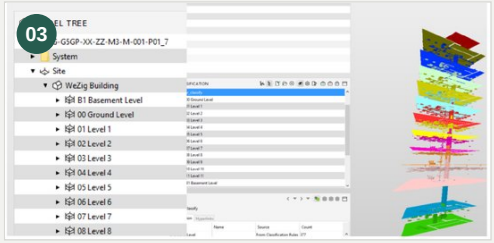

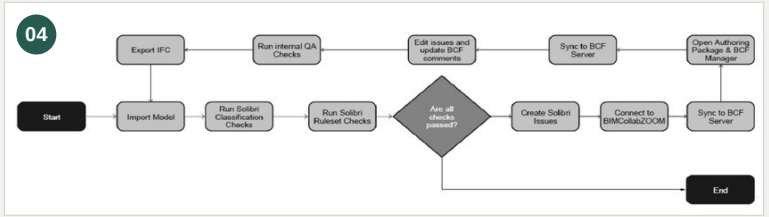

Masters · Global BIM Management

Developing the BEP

As project BIM Coordinator I worked with the BIM Manager to develop the BEP. The Exchange Information Requirements were continuously developed and expanded through the project stages — the EIR defined from the client perspective, then passed through the project team to define the BEP.

WHAT IT DELIVERED

- Clearly defined goals and requirements
- Established responsibilities and roles
- Clear instructions on how information exchange is executed
- Level of Information Need controlled over-production and resolved overlooked work

BSc · Architectural Technology

Student Accommodation

London School of Musical Theatre · Borough Rd

Accommodation for musical-theatre students on a triangular corner site. The equalizer-inspired south-west façade responds to the students' discipline; common spaces face a new park and vertical gardens.

Approach

Whole building modelled in Revit; sections, elevations and plans extracted and edited within it

CLT structure for a reduced carbon footprint; centrally placed core for circulation

Renders generated in Lumion, edited in Photoshop

Revit · Lumion · Photoshop



BSc · Architectural Technology

Concept development

…take pleasure in the impact of one sound on another…

George Orwell

An equalizer-based form drives the south-west façade for the musical-theatre and production students. Floor-plate areas were dictated by that inspiration and by the triangular corner site at the intersection of two main roads.



BSc · Architectural Technology

Room variations & materials

Arranging the living space

Vertical mirrored wardrobe doors create an illusion of wider space

Floor-to-ceiling windows add volume and light, supporting wellbeing and study

Built-in furniture maximises storage without compacting the room

A range of room options to suit budget and preference

Materials & plan

Natural, eco-friendly, locally sourced CLT for structure and interiors


A centrally placed core aids circulation and escape routes

Repeating layout eases services placement; colour-coded plans mark spaces

Plans and renders produced in Revit and Lumion, edited in Photoshop

There is no limit to how the room can reflect who you are.



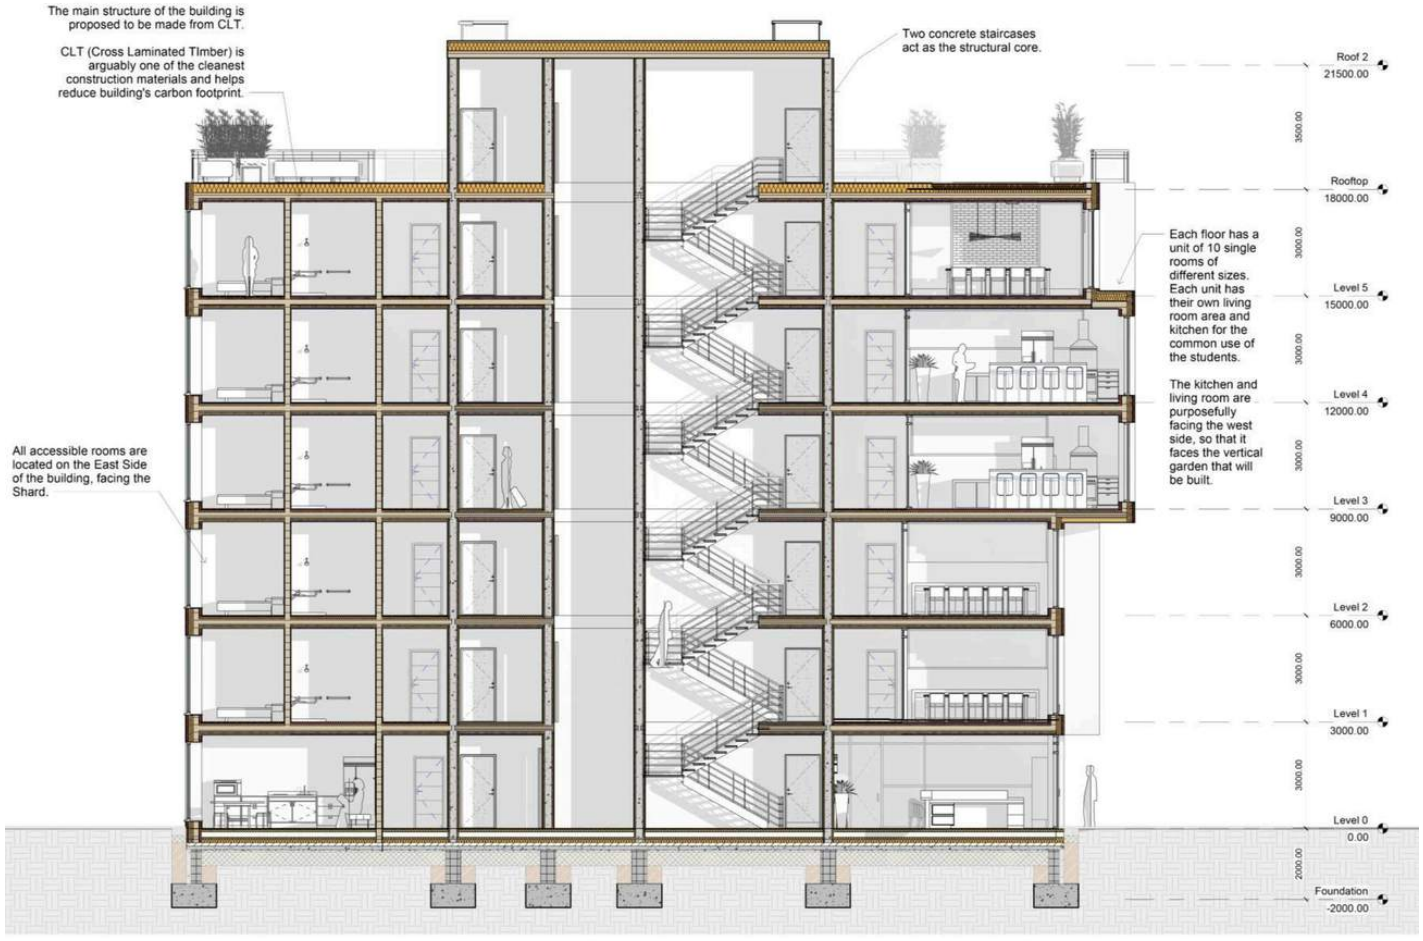

Section - North

Technical resolution

CLT structure & repeating units

Twin concrete stair cores act as the structural core. Each floor holds a unit of ten single rooms with a shared living room and kitchen — purposefully facing the vertical garden. All accessible rooms sit on the east side.

BSc · CIAT Gold Award

Arch Climbing Center

Old biscuit factory · Bermondsey

A vertical extension of an existing bouldering centre. The scheme preserves the historic brick exterior and adds a CLT-and-glass mountain form — nature over humanity — for a bigger climbing and bouldering centre.

Approach

Concept modelled with Revit's massing tool; panel rationalisation in AutoCAD

Complex geometry imported to Revit; sections, details and elevations extracted within it

Zipline and café viewing platform overlooking the main climbing wall

Revit massing · AutoCAD · Lumion · Photoshop





ARCH CLIMBING CENTER - CIAT GOLD AWARD

The need to conquer, and the curiosity to know what's on top.

BSc · CIAT Gold Award

Zipline & café platform

The proposal features a unique zipline across the bridge between the two structures, and a café viewing platform overlooking the main climbing wall and zipline — making the centre a landmark in the area.

A sample first-floor plan with room legend, all made and edited in Revit


Renders generated in Lumion from Revit, edited in Photoshop



Glulam structure

Resolving a complex shape

A unique timber portal frame — different in each section every six metres — holds the main building envelope, with additional support from concrete stair cores. Glulam and CLT were chosen as a sustainability decision to reduce the building's carbon footprint.

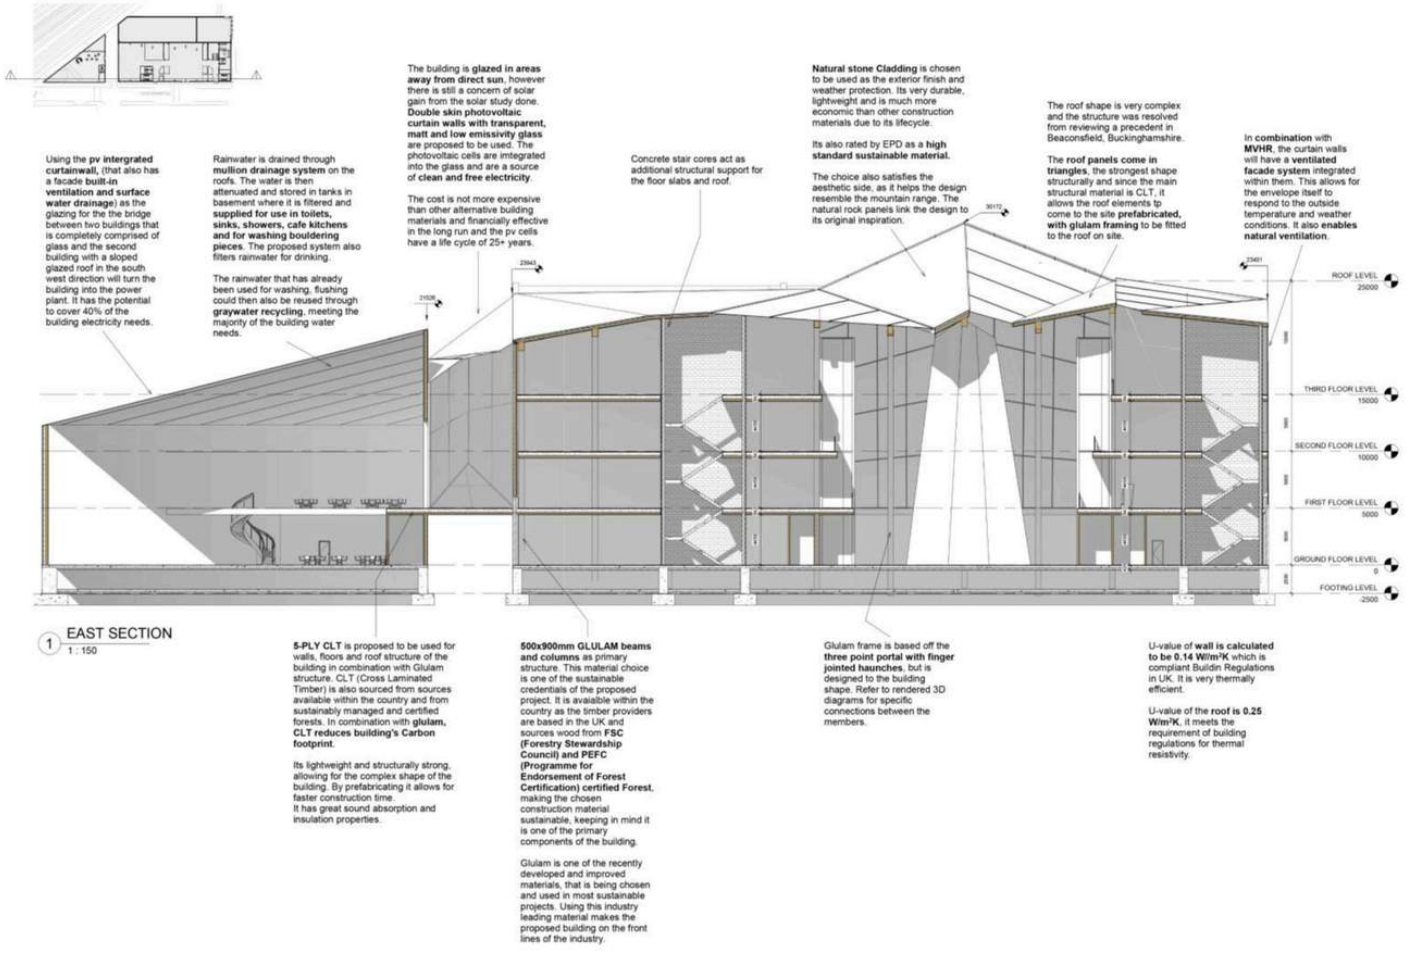

BSc · CIAT Gold Award

Construction detailing

Technical package for the Arch Climbing Center. Junction details, sections and the glulam frame were drawn in Revit and AutoCAD, resolving how a prefabricated timber structure meets the existing brick building.

What this shows


01 Wall, floor and roof junction details at 1:10, with section


02 Exploded axonometric of structure, cores and envelope


03 Glulam portal frame and prefabricated roof structure

04 Roof to frame connection

Revit · AutoCAD · Glulam and CLT · U values to Building Regulations

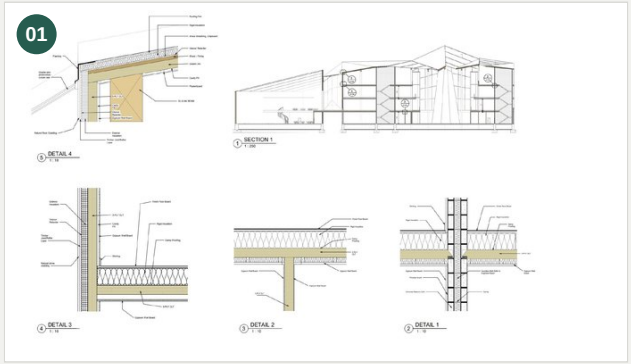

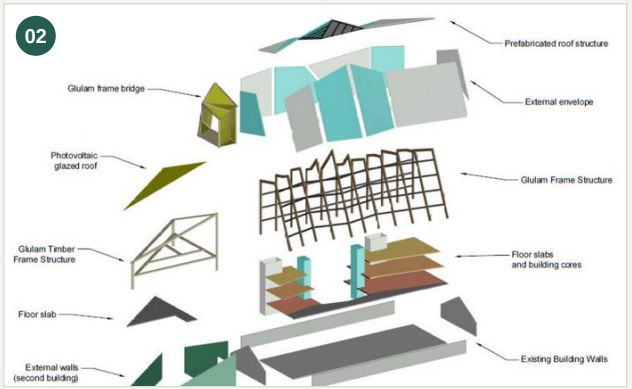

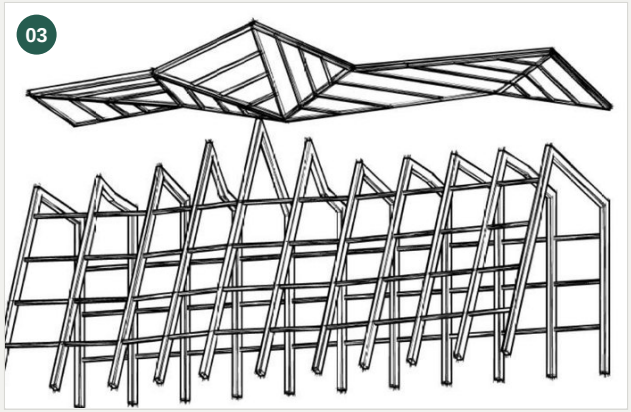



Education

Academic record

2020

MSc Global BIM Management

Universitat de Barcelona / Zigurat Global Institute of Technology

First-class joint degree, ranked top student in the year. Outstanding master's thesis in project management with BIM principles; invited as alumni speaker on postgraduate BIM education.

2018

BSc Architectural Technology

University of Westminster · 2:1 Honours

Gold Award from the Chartered Institute of Architectural Technologists (CIAT) for the graduation project — the Arch Climbing Center.

CONTACT

Sandi Nurpeissova

Senior BIM Coordinator

Telephone
+44 (0)7462 724884

Email
sandinurpeissova99@gmail.com

Location
London, UK